

## SLS10/15 MANUAL STAINLESS STEEL SCISSOR LIFT PALLET TRUCK

1. Unique one cylinder system guarantees: no risk of old leakage, no risk of dropping to the second piston.

2. Ergonomically designed handle with comfortable rubber grip allows the optimized safety as well as comfort, Three position operational handle lever for lifting, transporting and lowering purposes.

SLS		1KG=2.2LB 1INCH=25.4MM	
Item/Type		SLS10	SLS15
Capacity	kg	1000	1500
Min. fork height	mm	85	85
Max. fork height	mm	800	800
Size of fork	mm	160x50	160x50
Width of overall fork	mm	540/680	540/680
Length of fork	mm	1150	1150
Fork roller	mm	80x70	80x70
Big wheel	mm	180x50	180x50
Weight	kg	120/125	125/130



## SLS10E/15E ELECTRIC STAINLESS STEEL SCISSOR LIFT PALLET TRUCK

1. Come with maintenance-free 60AH battery and built-in smart charger, loads can be lifted both manually and electrically.

2. Position your height quickly and effortlessly at the push of the button when working at frequently changing heights.

SLSE		1KG=2.2LB 1INCH=25.4MM	
Item/Type		SLS10E	SLS15E
Capacity	kg	1000	1500
Min. fork height	mm	85	85
Max. fork height	mm	800	800
Size of fork	mm	160x50	160x50
Width of overall fork	mm	540/680	540/680
Length of fork	mm	1150	1150
Fork roller	mm	80x70	80x70
Big wheel	mm	180x50	180x50
Battery V/AH		12V/60AH	12V/60AH
Lifting motor power		0.8KW	0.8KW
Weight	kg	155/160	160/165



## MANUAL SCISSOR LIFT PALLET TRUCK

■ Ergonomically designed scissor lift pallet truck or called work positioner can lift and place your materials at the most productive working height safest for the worker, preventing back injuries caused by bending and lifting.

■ Designed to raise open-bottom pallets to proper working height with support legs deploy automatically to ensure operator safety.

■ Single cylinder for robustness and less maintenance.

Single Cylinder Manual Scissor Lifter			
Model		MSL10	
Capacity	Kg	1000	
Min. fork height	mm	85	
Max. fork height	mm	800	
Lifting stroke (unloaded)		28	
Lifting stroke (loaded)		70	
Width across forks	mm	540	680
Fork width	mm	160	
Fork length	mm	1170	
Front wheel Dia.	mm	Ø75X50	
Big wheel Dia.	mm	Ø180X50	
Overall length	mm	1738	
Overall width	mm	579	719
Overall height	mm	1266	
Net weight	Kg	109	
4 Units Package size	cm	214X62X111	214X76X111
Quantity for 20" container		72	64



## ELECTRIC SCISSOR LIFT PALLET TRUCK

■ Available in Manual Pump or Battery Operated models (complete with 12V/50A maintenance-free AGM battery with built-in charger that plugs into any outlet). All models also available in 540mm or 680mm width configuration.

Single Cylinder Scissor Pallet Truck			
Model		ESL10	
Capacity	Kg	1000	
Min. fork height	mm	85	
Max. fork height	mm	800	
Lifting stroke (unloaded)		15S	
Lifting stroke (loaded)		25S	
Lowering speed		0.1m/s	
Width across forks	mm	540	680
Fork width	mm	160	
Fork length	mm	1170	
Front wheel Dia.	mm	Ø75X50	
Big wheel Dia.	mm	Ø180X50	
Overall length	mm	1738	
Overall width	mm	579	719
Overall height	mm	1285	
Net weight	Kg	134	
4 Units Package size	cm	214X62X111	214X76X111
Quantity for 20" container		72	64
Battery (Gel)	Weight	15.2Kg	
	Size	224X135X175mm	
	V/Ah	12V/50Ah	
Lifting Motor		12V/800W	



## SCISSOR LIFT PALLET TRUCK

Scissor lift pallet truck design to load and unload conveyor, feed presses, or any applications requiring moving and positioning pallets or containers of materials.

- Equipped with quick lift function doubles the lift speed for loads lighter than 200kg.
- With pressure relief valve and overload valve to prevent pump damages when loads exceeds weight limits.
- The enclosed fork tips and reinforced fork frames ensures long service life.

Hand Scissor Lift Pallet Truck		1KG=2.2LB 1INCH=25.4MM		
ITEM \ TYPE		HLT10	HLT15	HLT(N)10
Capacity Q	Kg	1000	1500	1000
Min. fork height h	mm	85	85	85
Max. fork height h,	mm	800	800	800
Size of fork exs	mm	162x50	162x50	162x50
Length of fork l	mm	1140	1100	1150
Width overall fork (adjust/fixed) b5	mm	520/680	520/680	540/680
N.W.	Kg	105/112	118/125	128/133
Fork rollers	mm	Ø75x50	Ø75x50	Ø75x50
Big wheel	mm	Ø150x50	Ø150x50	Ø180x50
Dimension of wooden crate	mm	1930x580x720/ 1930x740x720	1930x580x720/ 1930x740x720	2040x600x1110/ 2040x740x1110
Pcs/20' container	mm	120/96	120/96	72/64

Note:HLT10&HLT15 is two-cylinder-system  
HLT(N)10 is one-cylinder-system



## ELECTRIC SCISSOR LIFT PALLET TRUCK

Powered by 12 voltage battery, driven by a good effective pump station. Used as both a work table and pallet truck 10-12 seconds pumping from the bottom to the top.




Electric Scissor Lift Pallet Truck		1KG=2.2LB 1INCH=25.4MM		
Model	Lifting Capacity(kg)	Lowest Fork Height(mm)	Max Fork Height(mm)	Fork Length X Fork Width(mm)
DGB1500	1500	85	800	1100×520 1100×680
DGB1000	1000	85	800	1140×520 1140×680
	Dia.of front wheel(mm)	Dia.of rear wheel(mm)	Lifting time in full range(s)	Size of Fork(mm)
DGB1500	Ø75x50	Ø150x50	18	162×50
DGB1000	Ø75x50	Ø150x50	10/12	162×50
	Descending Speed(mm/s)	Motor working voltage(v)	Battery voltage(v)	Electricity volume(A/hour)
DGB1500	<0.1	12	12	63
DGB1000	<0.1	12	12	63
	Working pressure of Pump Station(Mpa)	Input/output voltage of Charger(v)	Max charging current of charger(A)	
DGB1500	21	AC230/115DC12	10	
DGB1000	15	200-240/12	10	

- Safety overload system prevents the truck from being used beyond its rated capacity.
- The handle automatically returns to its upright position when released.
- Lifting motor power 1.1KW.

## TWO-CYLINDER SCISSOR LIFT PALLET TRUCK

With pressure relief valve and overload valve to prevent pump damages when loads exceeds weight limits.

Nylon steering wheel and fork rollers as standard option for damp or harsh environments applications.

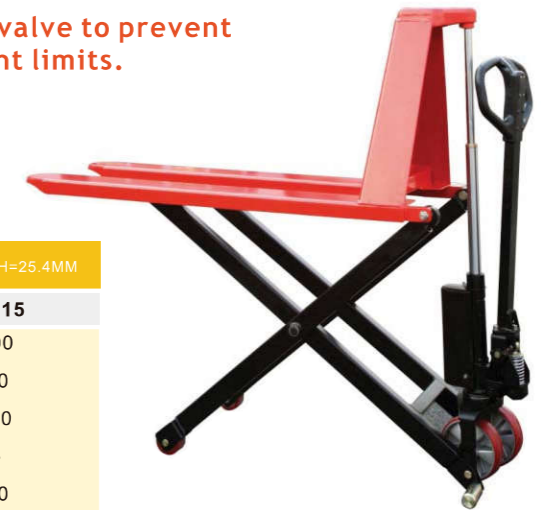

Stainless Scissor Lifter		1KG=2.2LB 1INCH=25.4MM	
TYPE	SLP10	SLP15	
capacity	1000	1500	
fork width(W)	540	680	
fork length(L)	1150	1150	
min.fork height(H)	85	85	
Max. fork height	800	800	
front wheel	PU/Nylon 80*50		
rear wheel	PU/Nylon 180*50		
net weight	110	125	



- The INOX version of Scissor lift pallet truck is designed for corrosive environments or applications with high standards of hygiene where the goods need to be handled at a convenient working height.
- Ideal transport aid for application in damp or harsh environments such as meat or fish processing plants, dairies, pharmaceutical and chemical industry as transport aid as well as working table.

## STAINLESS SCISSOR LIFT PALLET TRUCK

Stainless Scissor Lifter		1KG=2.2LB 1INCH=25.4MM	
TYPE	SLP10-INOX		
capacity	1000		
fork width(W)	540		
fork length(L)	1150		
min.fork height(H)	85		
Max. fork height	800		
front wheel	PU/Nylon 80*50		
rear wheel	PU/Nylon 180*50		
net weight	110		

The ACX 10M / ACX 10E is the manual and electric scissor lift pallet truck with 2200lbs capacity and 31 1/2 inch maximum lifting height; designed to be used to work as a lifting table, marshalling table, work bench or as a standard hand pallet truck.

1KG=2.2LB 1INCH=25.4MM

Single Cylinder Manual Scissor Lifter				
Model		ACX 10M		
Capacity	kg	1000	1000	
Fork Height Raised	mm	800	800	
Fork Height Lowered	mm	85	85	
Fork Length	mm	1170	1170	
Fork Width	mm	160	160	
Width Across Forks	mm	540	680	
Width Between Forks	mm	200	370	
Caster Dia.	mm	180	180	
Caster Material		Polyurethane	Polyurethane	
Overall Length	mm	1730	1730	
Overall Width	mm	585	710	
Overall Height	mm	1270	1270	

## SCISSOR LIFT PALLET TRUCK


- Closed fork tips and reinforced chassis ensure high lifetime.
- Ergonomically designed and comfort-able handle with higher grip casing.
- Single cylinder for robustness and less maintenance.



## ELECTRIC SCISSOR LIFT PALLET TRUCK

1KG=2.2LB 1INCH=25.4MM

Single Cylinder Electric Scissor Lifter				
Model		ACX 10E		
Capacity	kg	1000	1000	
Fork Height Raised	mm	800	800	
Fork Height Lowered	mm	35	35	
Fork Length	mm	1170	1170	
Fork Width	mm	160	160	
Width Across Forks	mm	540	680	
Width Between Forks	mm	200	370	
Caster Dia.	mm	180	180	
Caster Material		Polyurethane	Polyurethane	
Overall Length	mm	1730	1730	
Overall Width	mm	585	710	
Overall Height	mm	1270	1270	

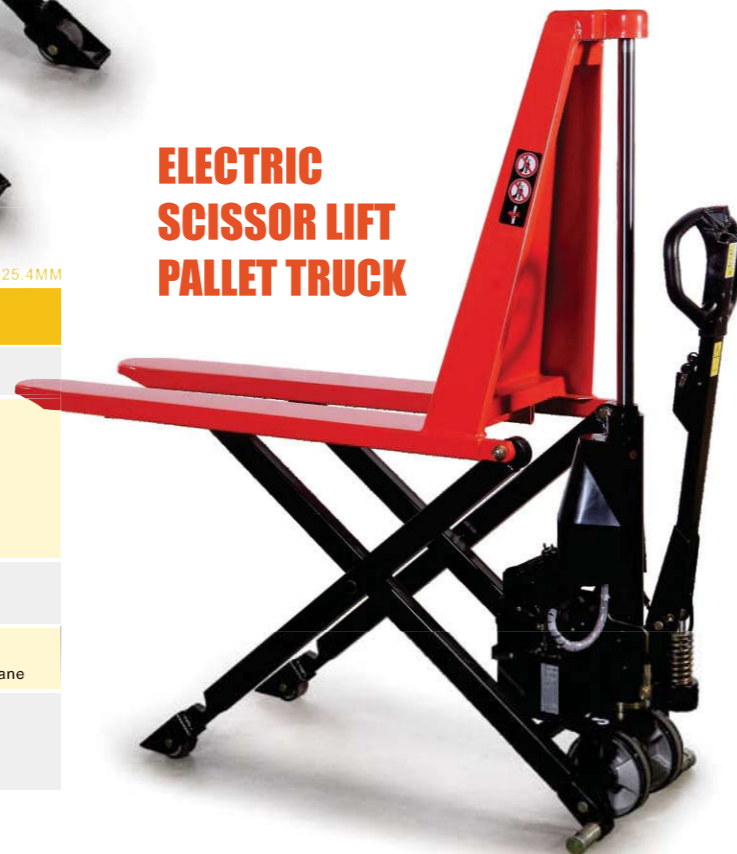

- Optional emergency button.
- Optional deep discharge protection.

## MANUAL SKID LIFTER


- The Skid Lifters are a unique combination of lift table and pallet truck.
- Ideally suited for direct mail organizations and companies involved in printing to load and unload large bundles of envelopes, magazines and trays of materials.
- Captured scissors roller provides greater stability in raised position.
- Lowered height provides easy access to skids, tote boxes, wire container and much more.



Manual

1KG=2.2LB 1INCH=25.4MM

Model		4ZD60	2MNW5	4ZD59	2MNW6
Capacity	kg	500	500	1000	1000
Fork Height Raised	mm	830	830	830	830
Fork Height Lowered	mm	85	85	85	85
Fork Length	mm	1120	1120	1120	1120
Fork Width	mm	160	160	160	160
Width Across Forks	mm	680	520	680	520
Width Between Forks	mm	360	200	360	200
Caster Dia.	mm	152	152	152	152
Caster Material		Polyurethane	Polyurethane	Polyurethane	Polyurethane
Caster Type		2 Swivel, 2 Rigid	2 Swivel, 2 Rigid	2 Swivel, 2 Rigid	2 Swivel, 2 Rigid
Overall Length	mm	1550	1550	1640	1640
Overall Width	mm	740	570	710	560
Overall Height	mm	1070	1070	1270	1270

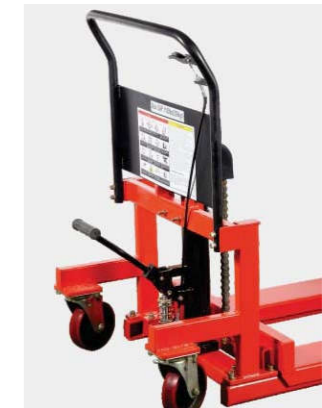

Hand Pallet Truck

## ELECTRIC SKID LIFTER

Powered units provide easier and faster lifting.

Electric

1KG=2.2LB 1INCH=25.4MM

Model		2MNW7
Capacity	kg	1000
Fork Height Raised	mm	876
Fork Height Lowered	mm	85
Fork Length	mm	1120
Fork Width	mm	160
Width Across Forks	mm	680
Width Between Forks	mm	360
Caster Dia.	mm	152
Caster Material		Polyurethane
Caster Type		2 Swivel, 2 Rigid
Overall Length	mm	1770
Overall Width	mm	710
Overall Height	mm	1270

